


TOTTON PUMPS

NDP35/3
Magnetically coupled
centrifugal pump

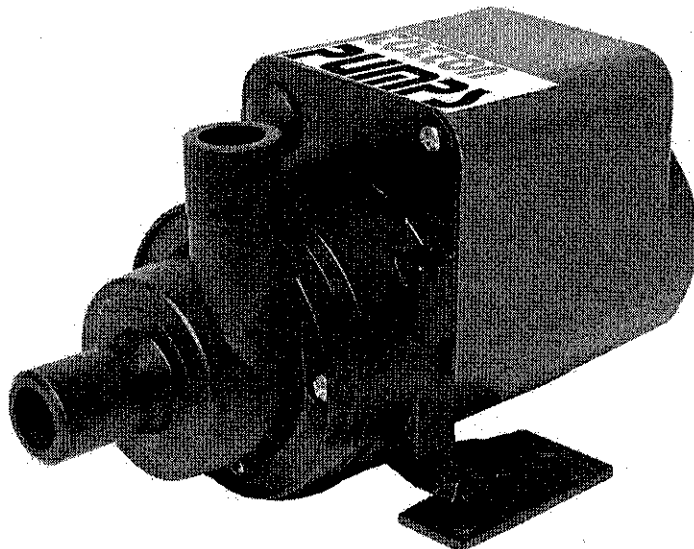

Principal applications

For continuous transfer/recirculation of aggressive chemicals, chilled water, pure or precious liquids, in photographic, reprographic, X-Ray and industrial processing equipment, particularly where space is limited.

Wetted materials

Standard EPDM 'O' ring, optional Nitrile or Viton®

PP encapsulated magnet

PP pump housing

PPS option available

Alumina ceramic spindle

Features

Manufactured in chemical resistant thermoplastics - entirely non-metallic

Magnetic couplings provide an energy efficient thermal shield, minimising heat transfer to pumped fluids.

Leak free continuous operation

Drip-proof IP22 motor housing

Zero maintenance

NDP 35/3

230V 1ph 50Hz

230V 1ph 50Hz

230V 1ph 60Hz

230V 1ph 60Hz

Port Details

Plain 22mm

½" BSP M

Plain 22mm

½" BSP M

NDP 35/3

110V 1ph 50/60Hz

110V 1ph 50/60Hz

Port Details

Plain 22mm


½" BSP M



BS EN ISO 9002:1994
Certificate No. Q06356

Drawings not to scale
Dimensions in millimetres


NDP35/3

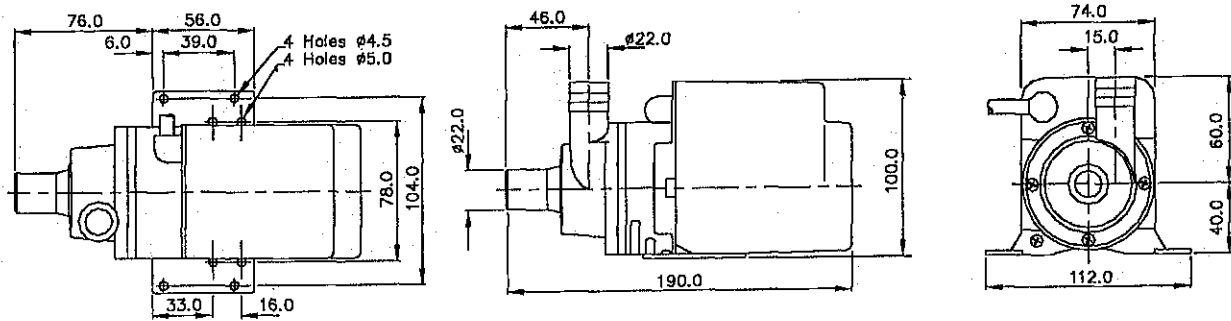

Specification

Model	Overall height mm	Overall length mm	Overall width mm	Weight kilos	Max body pressure bar	Max capacity litres/min	Max head metres	Temp range °C	*Max specific gravity	Motor output Watts
NDP 35/3	100	190	112	2.0	1.4	50Hz 35	2.3	-20° to +85°	1.0	18
						60Hz 33	3.6			

*assuming maximum viscosity of 30cp. Refer to the Company for higher viscosities & specific gravities

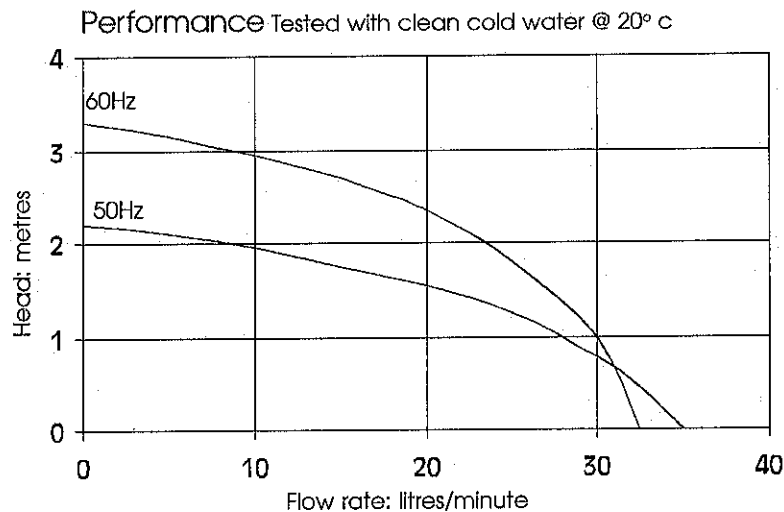

NOTE: These magnetically coupled pumps are designed for use with clean fluids. Solids will cause jamming. Abrasives will reduce pump life & invalidate the warranty.
NDP pumps are not self priming & are not designed to run dry
The company reserves the right to change specifications

a division of **the** Electric Motor Company Limited

phone+44 (0)23 8066 6685
fax+44 (0)23 8066 6880
email: info@totton-pumps.com
www.totton-pumps.co.uk